

BID # 01-220518

DISTRICT WIDE SEAL & STRIPE PROJECT – WEST SIDE VICTOR ELEMENTARY SCHOOL DISTRICT VICTORVILLE, CA

May 13th, 2022

ADDENDUM – 03

PLANS & SPECIFICATIONS

- ITEM NO. 1 PROJECT MANUAL, SPECIFICATION SECTION- 001116 NOTICE INVITING BIDS
 - A. The bid deadline remains 10:00 o'clock AM. on the **18th day of May 2022**. The location for receipt of Bids remains the District Office for Victor Elementary School District, located at 12219 2nd Ave., Victorville, CA 92395.
- ITEM NO. 2 PROJECT MANUAL, PLANS SECTION- 2022 ASPHALT MAPS WEST SIDE
 - A. Add General Notes, details and Special Conditions on all sheets to be applied throughout the project.
 - B. Revise site plans to include scope areas and specific areas that require R&R and Grind/Overlay per site.
 - C. Add Sheet D-1 to include additional striping required at Discovery School of the Arts.
 - D. Add Sheet P-1 to include additional striping required at Puesta Del Sol Elementary School.
 - E. Add Sheet L-1 to include additional striping required at Liberty School of Creativity and Innovation.
- ITEM NO. 3 PROJECT MANUAL, CONTRACT REQUIREMENTS PROJECT SCHEDULE
 - A. Add Project Schedule dated 05/05/2022.

REQUESTS FOR CLARIFICATIONS

ITEM NO. 4 Question: Project Manual, Notice Inviting Bids states that the successful bidder must possess a valid and active A or B license at the time of bid and throughout the duration of this Contract. Please advise if a C12 license is acceptable.

ADDENDUM - 03 03-1



Response: All Bidders

A valid and active C12 license at the time of bid and throughout the duration of the Contract is acceptable.

ITEM NO. 5 Question: Project Manual, Specifications call out Guard Top as the product to be used for Sealcoat. Please advise if Gold Seal can be utilized in lieu of Guard Top.

Response: All Bidders

Guard Top to be preferred material, contractor to provide substitution request for Gold Seal for review and approval.

ITEM NO. 6 Question: Project Manual, Minimum Asphalt Specification Item 1b notes that for Cracks greater than 3/4 inch a minimum of 2 inches is to be cut on each side of the crack. General note No.3 states contractor is to follow Detail A which provides an 18 inch section. Please advise how to proceed.

Response: All Bidders


Contractors to follow Detail A & B as it applies per General Notes for repairs of cracks greater than 3/4 inch.


ADDEDNUM ATTACHMENTS


- Revised Site Plans West Side (9 Sites)
- Sheet D-1: Additional StripingSheet P-1: Additional Striping
- Sheet L-1: Additional Striping
- Project Schedule


END OF ADDENDUM 03


ADDENDUM - 03 03-2

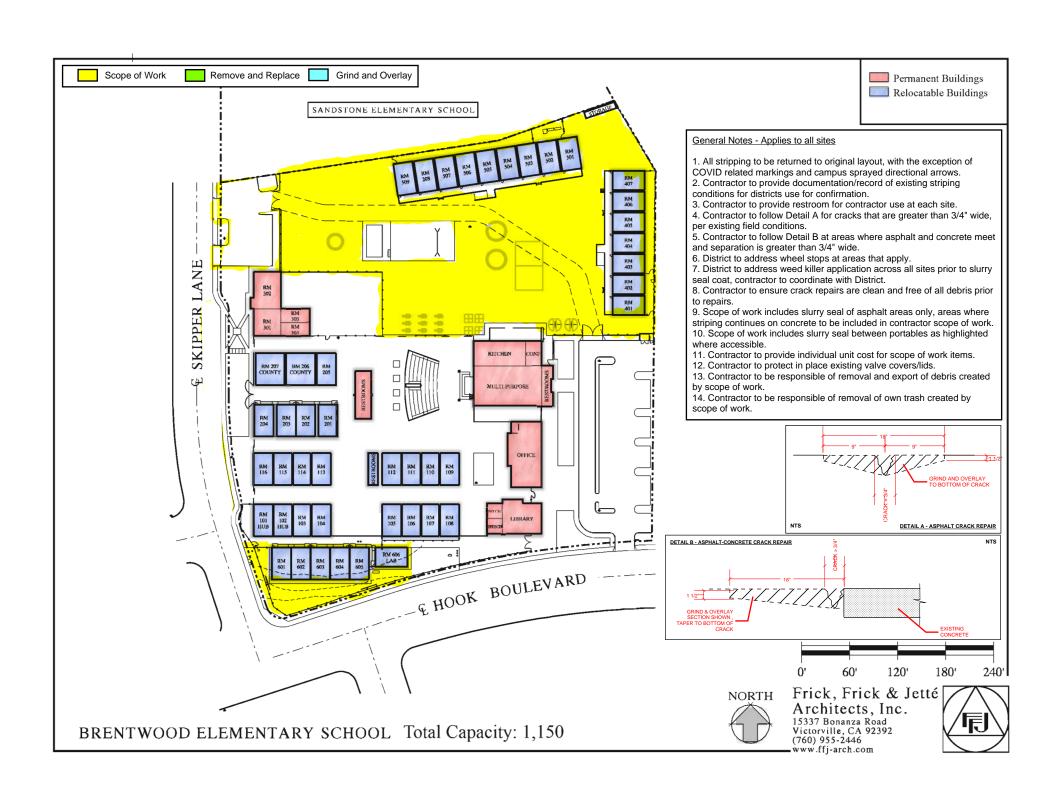

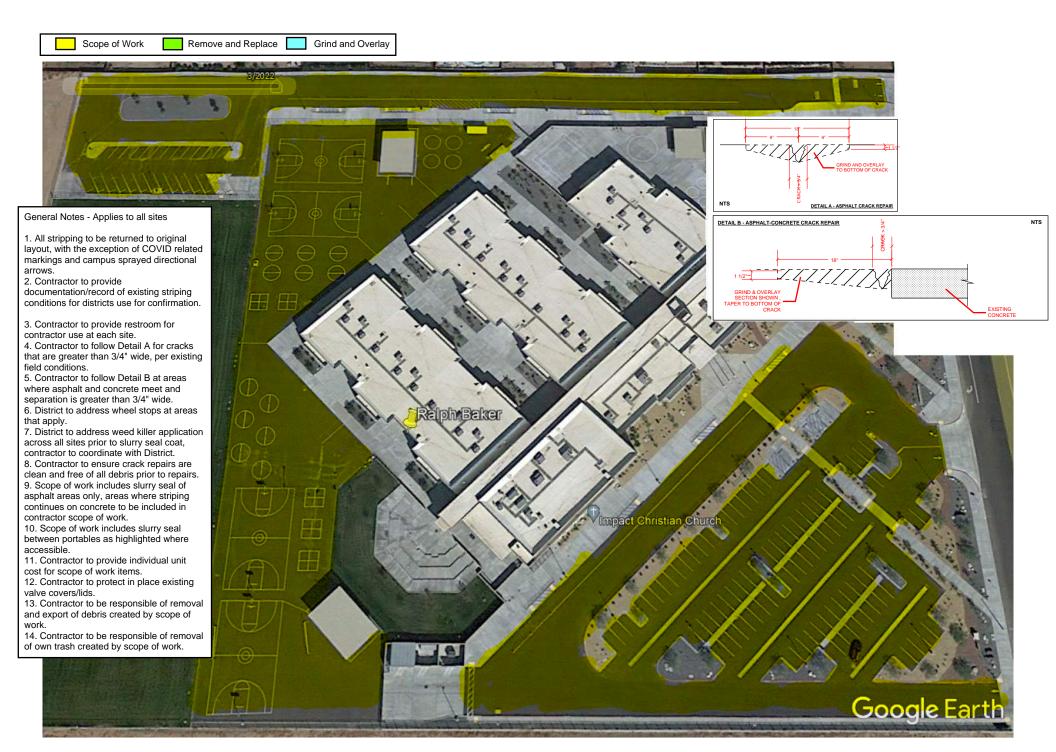


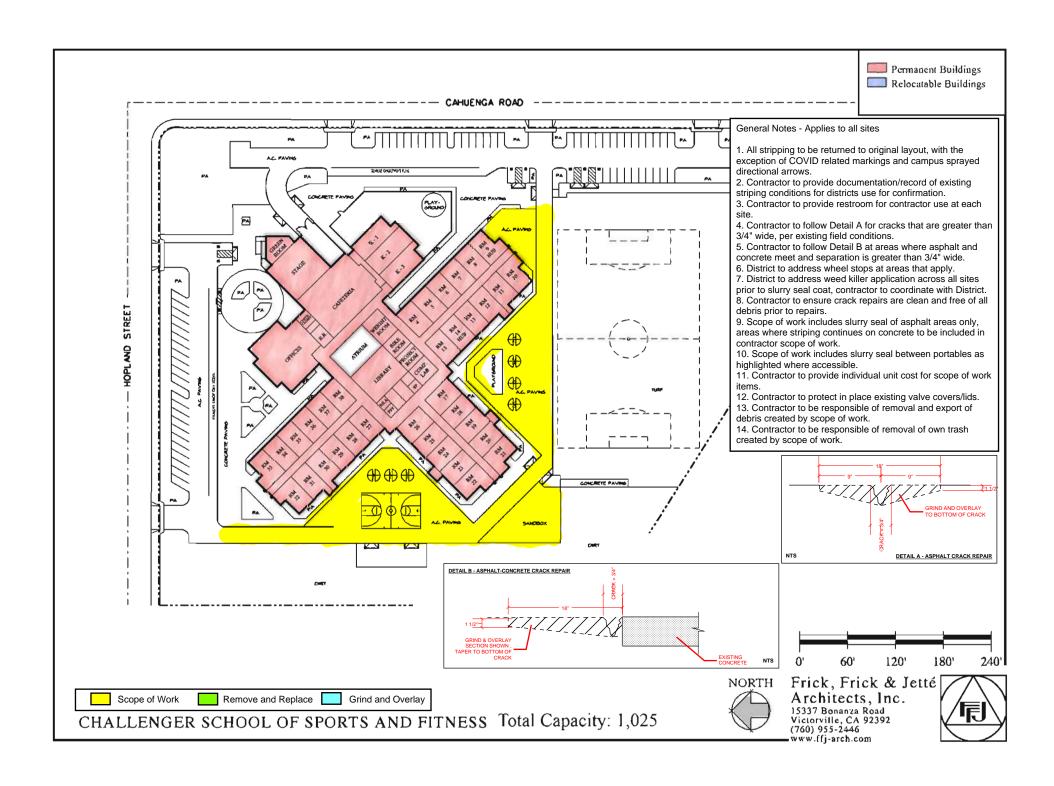

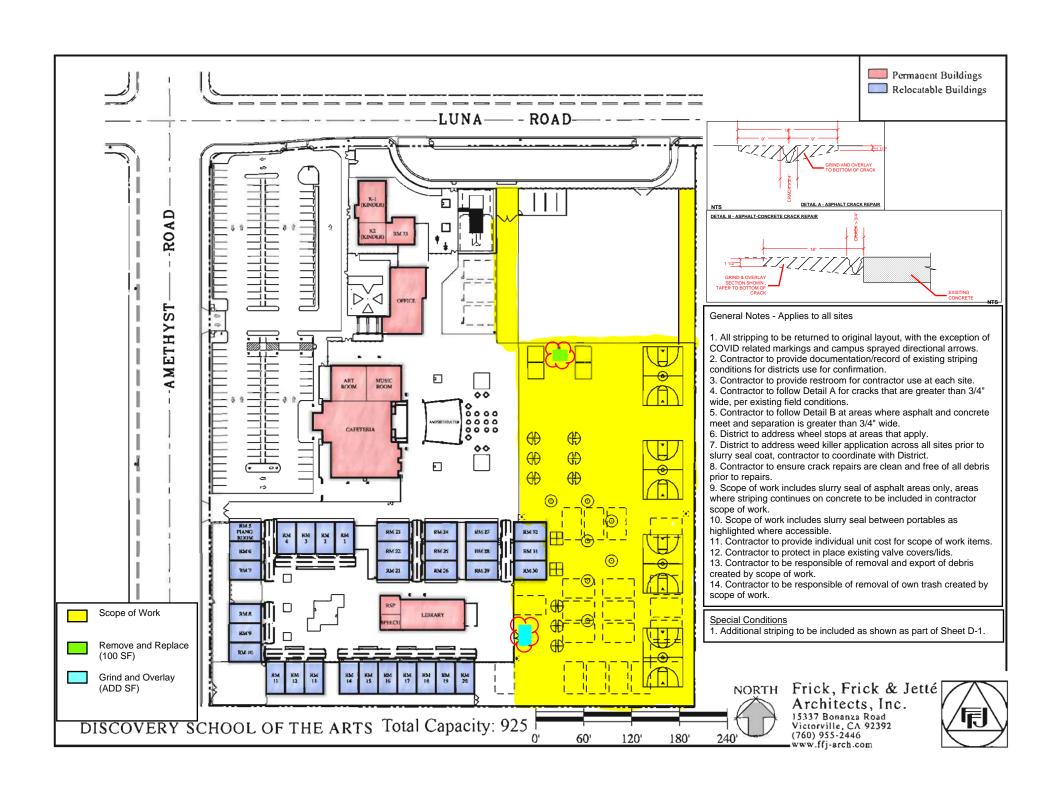


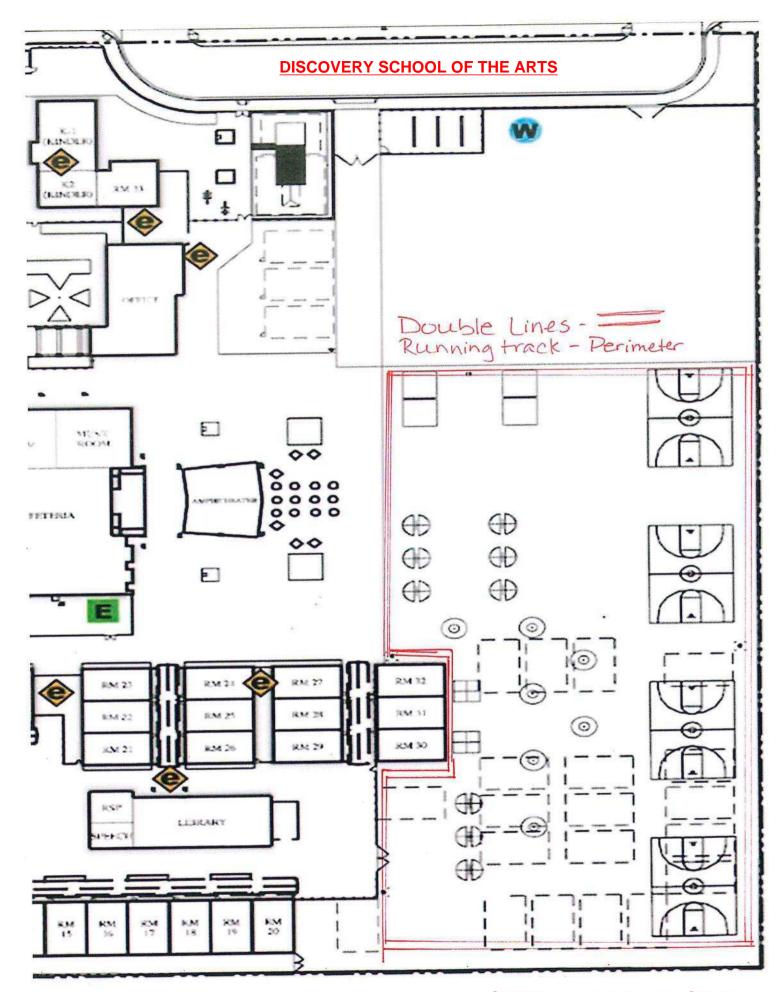



SHEET D-1: ADDITIONAL STRIPING

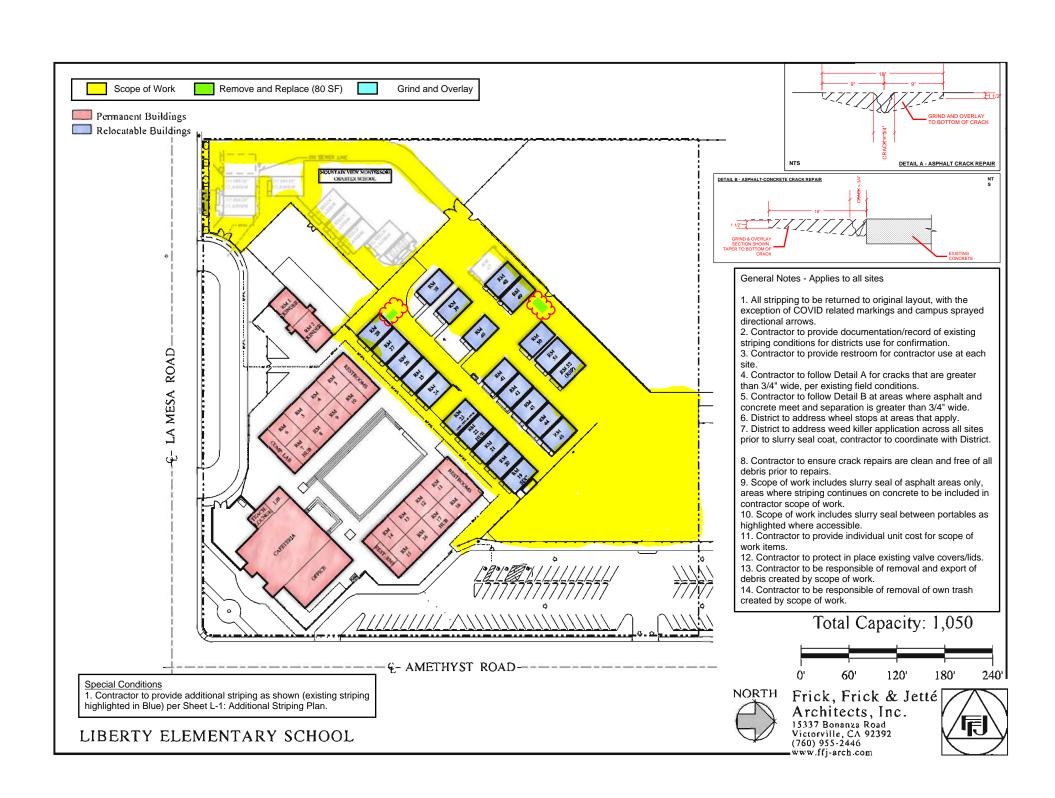


LIBERTY SCHOOL OF CREATIVITY AND INNOVATION

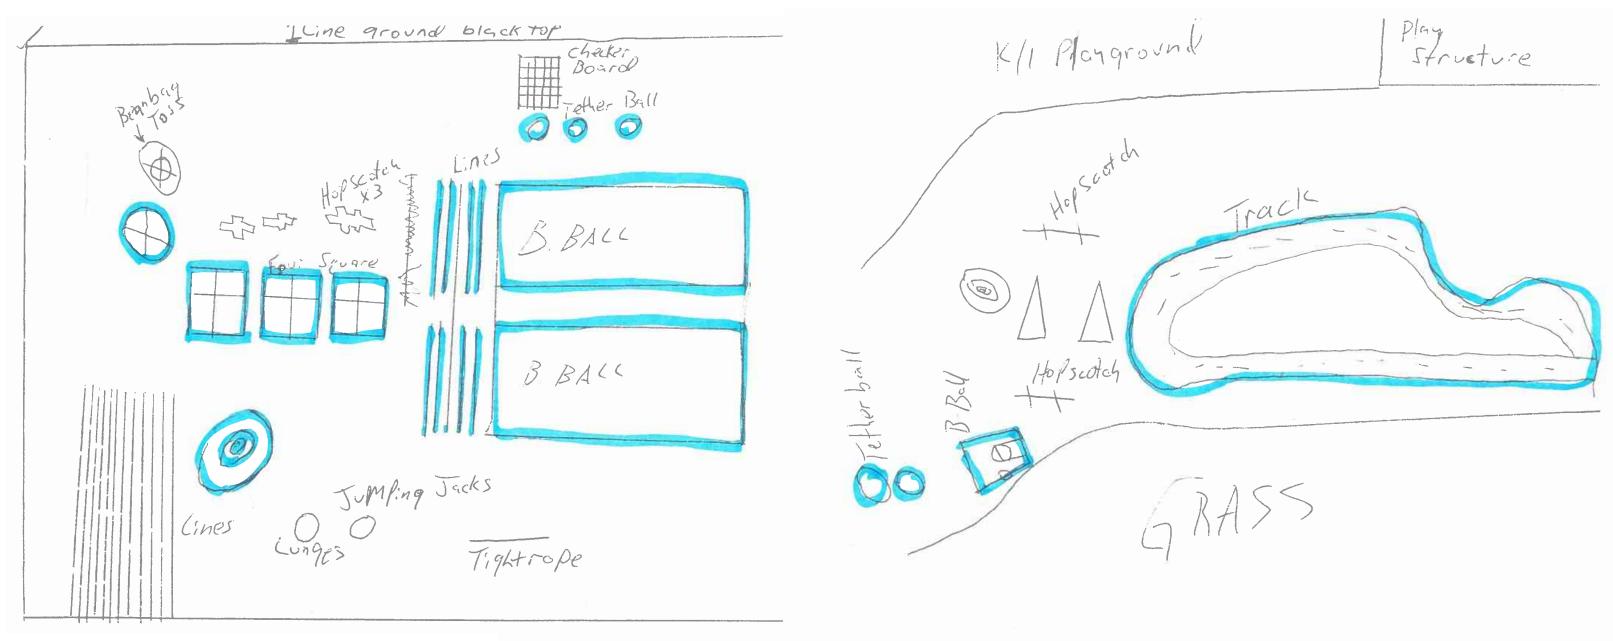

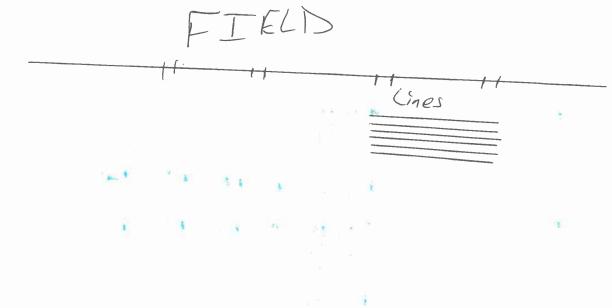

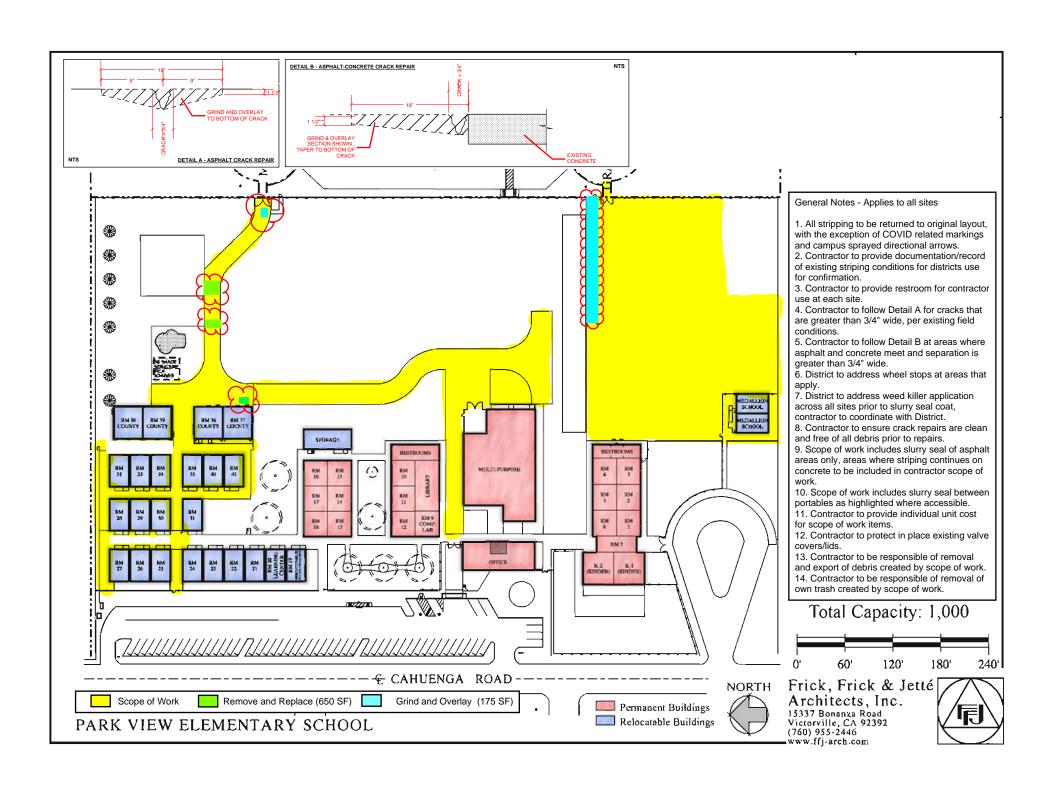


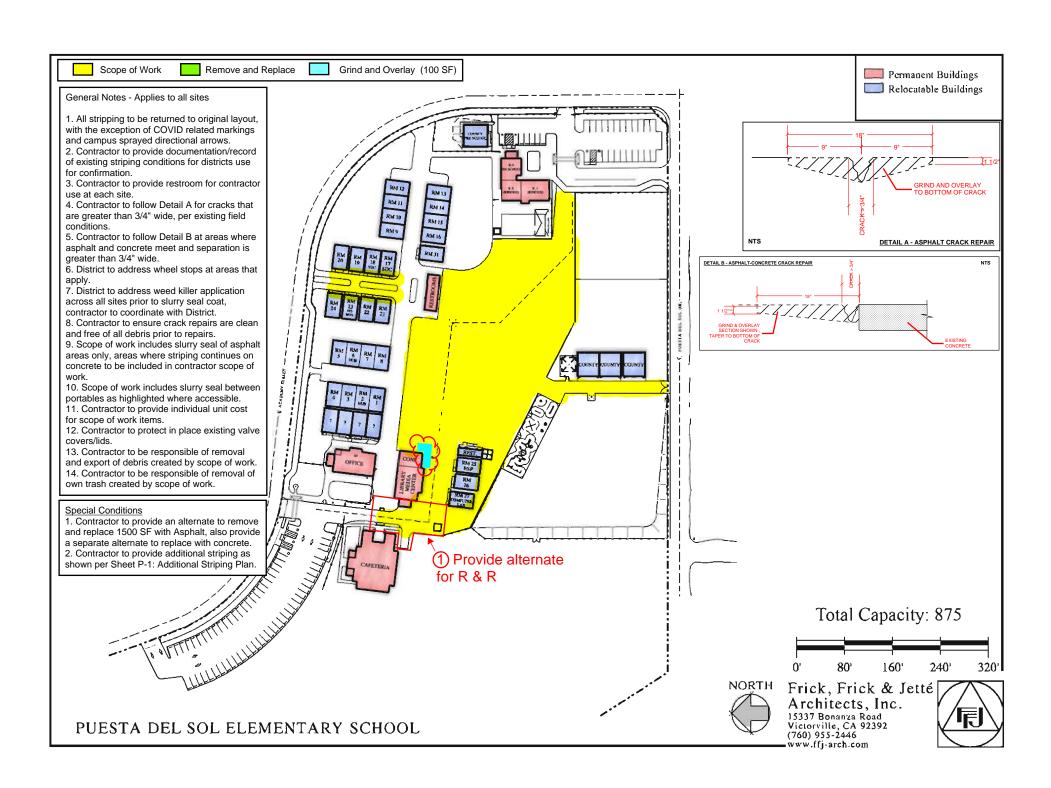


PUESTA DEL SOL



SHEET P-1: ADDITIONAL STRIPING PLAN

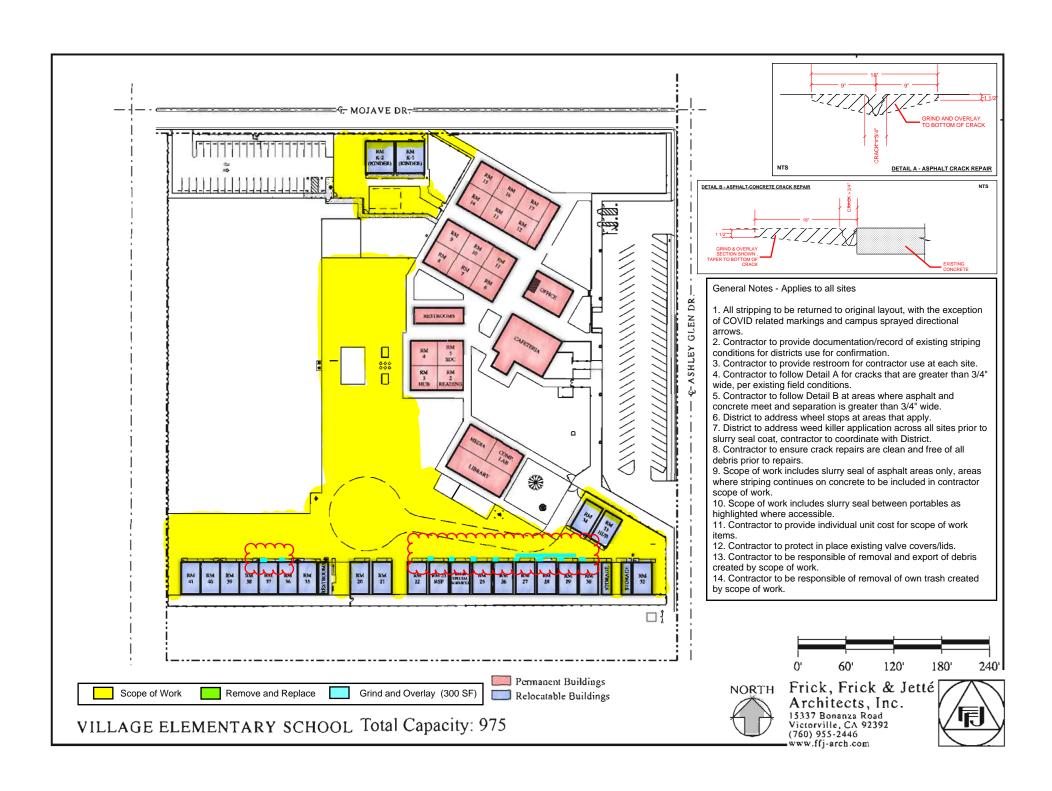


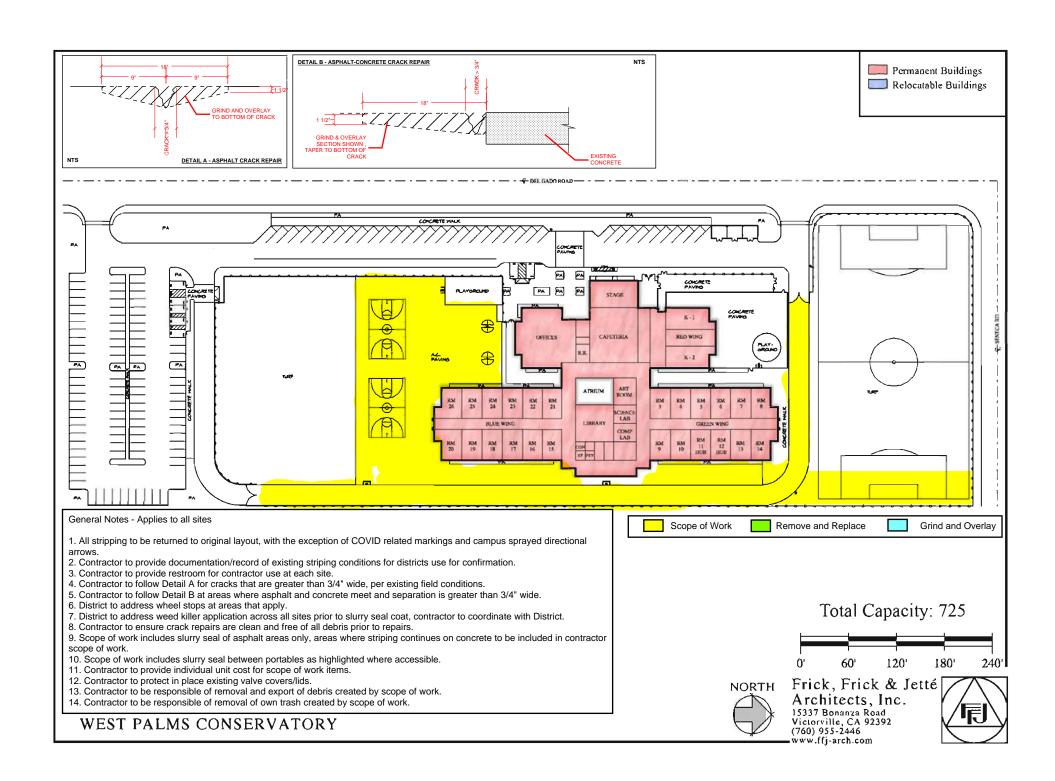




VESD - Asphalt Stripe & Seal West Side Schedule



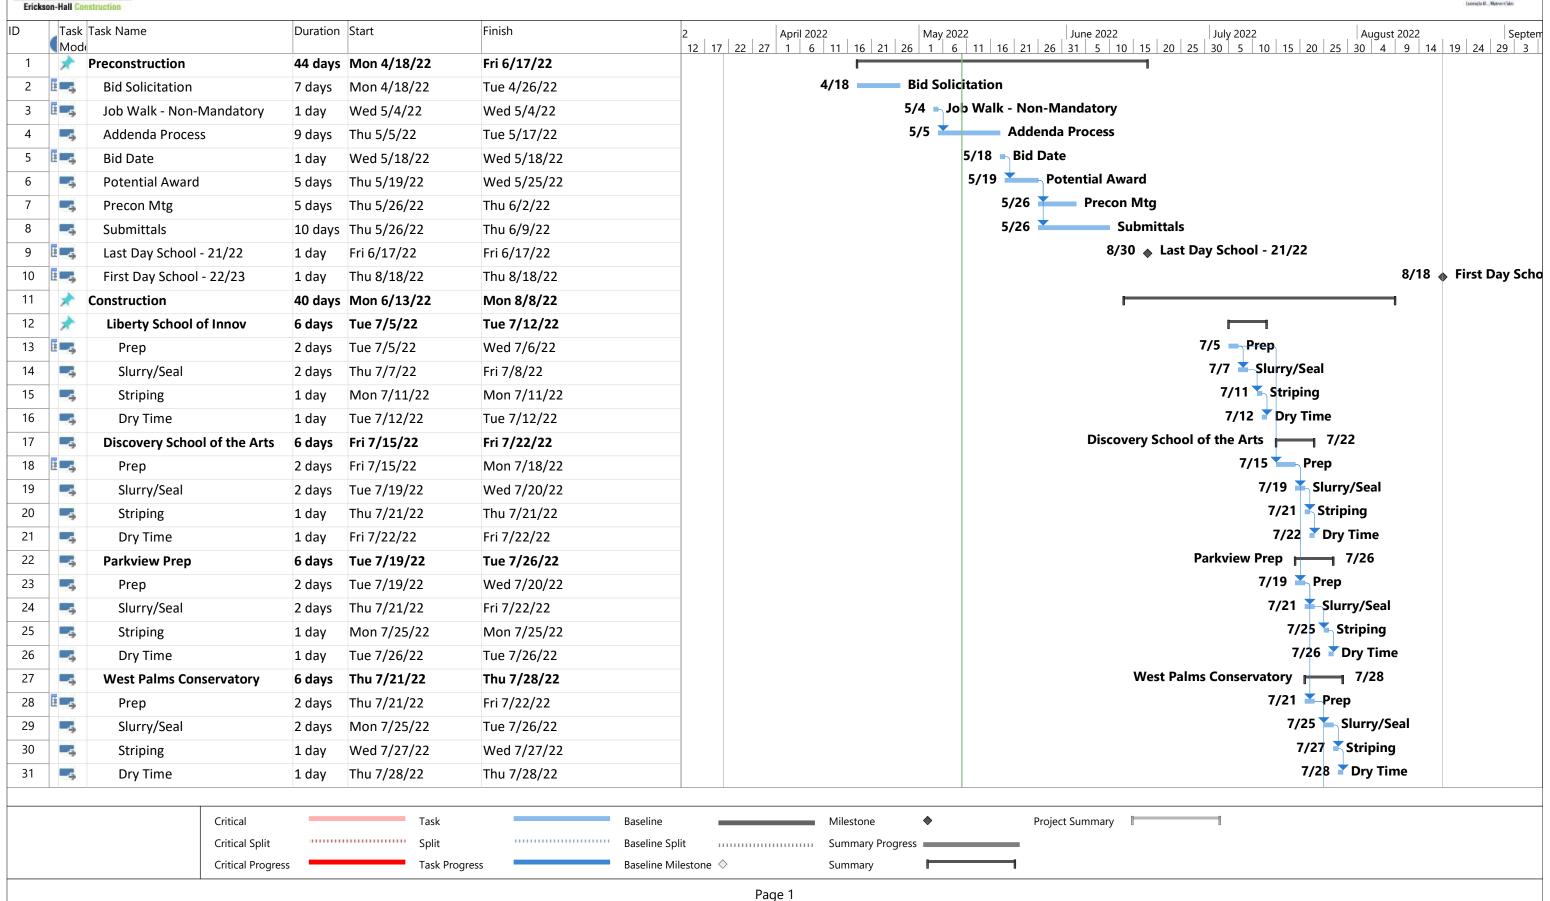



VESD - Asphalt Stripe & Seal West Side Schedule



)	Task	Task Name	Duration	Start	Finish	2 April 2022 May 2022 June 2022 July 2022 August 2022 12 17 22 27 1 6 11 16 21 26 1 6 11 16 21 26 31 5 10 15 20 25 30 5 10 15 20 25 30 4 9 14 19 24
32	=3	Brentwood School of Env	6 days	Mon 7/25/22	Mon 8/1/22	Brentwood School of Env 8/1
33	-5	Prep	2 days	Mon 7/25/22	Tue 7/26/22	7/25 Prep
34	-5	Slurry/Seal	2 days	Wed 7/27/22	Thu 7/28/22	7/27 Slurry/Seal
35	-5	Striping	1 day	Fri 7/29/22	Fri 7/29/22	7/29 Striping
36	-5	Dry Time	1 day	Mon 8/1/22	Mon 8/1/22	8/1 Dry Time
37	-5	Village STEAM	6 days	Wed 7/27/22	Wed 8/3/22	Village STEAM 8/3
38	-5	Prep	2 days	Wed 7/27/22	Thu 7/28/22	7/27 × Prep
39	-5	Slurry/Seal	2 days	Fri 7/29/22	Mon 8/1/22	7/29 Slurry/Seal
40		Striping	1 day	Tue 8/2/22	Tue 8/2/22	8/2 Striping
41	-3	Dry Time	1 day	Wed 8/3/22	Wed 8/3/22	8/3 [→] Dry Time
42	-3	Ralph Baker 21	4 days	Fri 7/29/22	Wed 8/3/22	Ralph Baker 21 P 8/3
43	-5	Prep	1 day	Fri 7/29/22	Fri 7/29/22	7/29 ▼ Prep
44	-5	Slurry/Seal	1 day	Mon 8/1/22	Mon 8/1/22	8/1 Slurry/Seal
45	-5	Striping	1 day	Tue 8/2/22	Tue 8/2/22	8/2 Striping
46	=	Dry Time	1 day	Wed 8/3/22	Wed 8/3/22	8/3 Dry Time
47	-5	Challenger School	4 days	Mon 8/1/22	Thu 8/4/22	Challenger School 6 8/4
48	-5	Prep	1 day	Mon 8/1/22	Mon 8/1/22	8/1 Prep
49	-5	Slurry/Seal	1 day	Tue 8/2/22	Tue 8/2/22	8/2 Slurry/Seal
50	-5	Striping	1 day	Wed 8/3/22	Wed 8/3/22	8/3 Striping
51	-5	Dry Time	1 day	Thu 8/4/22	Thu 8/4/22	8/4 Dry Time
52	-5	Puesta Del Sol	5 days	Tue 8/2/22	Mon 8/8/22	Puesta Del Sol 8/8
53	-3	Prep	2 days	Tue 8/2/22	Wed 8/3/22	8/2 Prep
54		Slurry/Seal	1 day	Thu 8/4/22	Thu 8/4/22	8/4 🔀 Slurry/Seal
55	-5	Striping	1 day	Fri 8/5/22	Fri 8/5/22	8/5 ∠ Striping
56	-5	Dry Time	1 day	Mon 8/8/22	Mon 8/8/22	8/8 Dry Time
57	*	Project Completion	5 days	Mon 8/8/22	Fri 8/12/22	F-1
58		Punchlist	5 days	Mon 8/8/22	Fri 8/12/22	8/8 — Punchlist

